

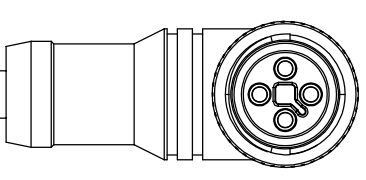



REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/12/2021	

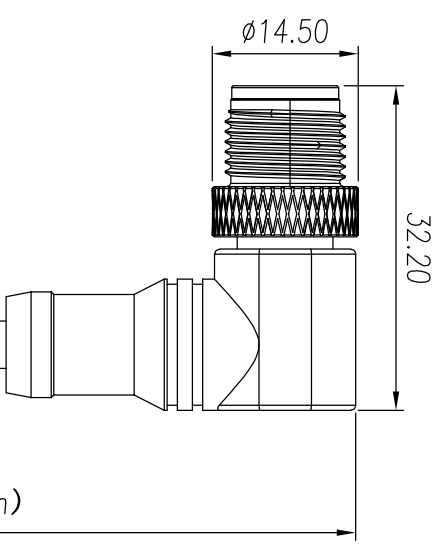


4	Black	4	Black
3	Blue	3	Blue
2		2	Whitr
1	Brown	1	Brown
PIN	WIRE	PIN	WIRE



3P



4P

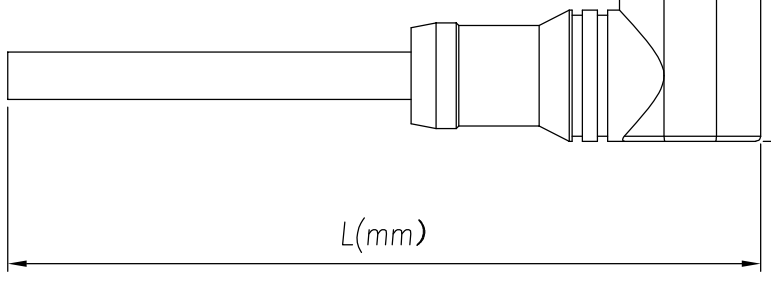


- NOTES:
- 1.RoHS Compliant
 - 2.Levels of protection: IP68
 - 3.Cable: UL2517,PVC/PUR,Black
 - 4.Operating temperature: -25℃~85℃
 - 5.Connector tolerances:

linear dimension	≡		□		//		L	
	over	over	over	over	over	over	over	
variable range	18 to 10	30 to 50	50 to 80	80 to 120	120 to 160	all	5 to 120	
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5 0.025 0.06 0.12 0.4

6. Cable length tolerance:

- 01~03m: ±50mm
- 04~06m: ±75mm
- 07~10m: ±100mm
- 11~20m: ±200mm
- 21~30m: ±300mm
- 31~99m: ±500mm

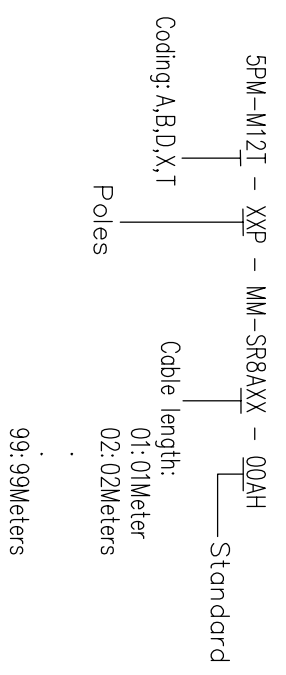

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	DATE: 09/12/2021
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 09/12/2021

PARA. NO.:	5PM-M12T-XXP-MM-SR8AXX-00AH
TITLE:	M12T male Plug
CUSTOMER:	

Cymannu 囍字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM