




REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	08/17/2021	


NOTES:

1. RoHS Compliant
2. Levels of protection: IP67
3. Installation mode: Solder, Front fastened
4. Operating temperature: -40°C~105°C
5. Applicable Panel: Panel Hole
6. Connector tolerances:  
For Panel Thickness Max: 4.5mm



variable range	linear dimension										≡	□	//	⊥	
	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	over 5 to 30	over 30 to 120	over 120 to					
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4			

5SD-M12D - XXP - MM-SR7001 - 00AH  
 Coding: A,B,D  
 Thread type: 000: PG9  
 Poles 001: M16\*1.5  
 Standard

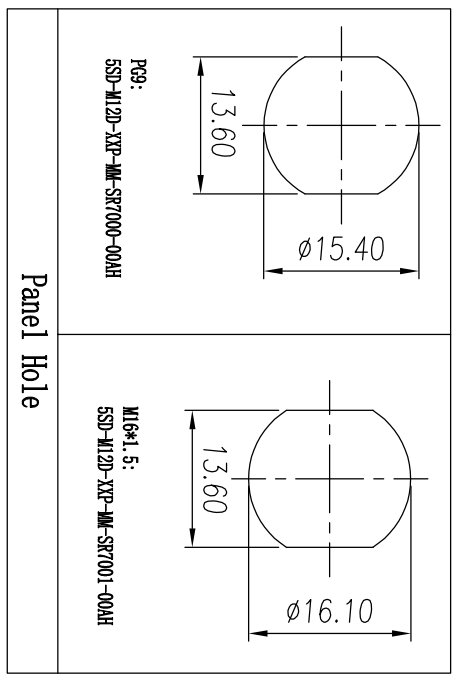

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	DATE: 08/17/2021	PART NO.: SSD-M12D-XXP-MM-SR7001-00AH	 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymannu.com WWW.CYMANNU.COM
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 08/17/2021	TITLE: M12D male Back Fastened Socket	