


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	04/29/2021	

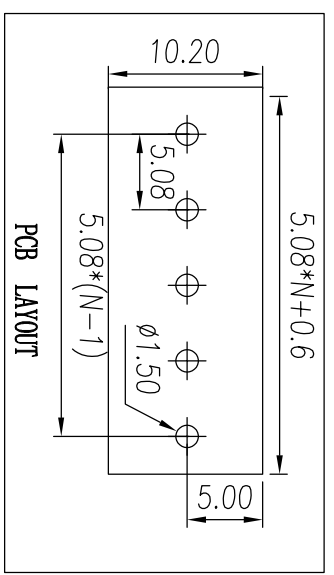

NOTES:




1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	16	/	10
Rate impulse voltage(KV)	1.6		


Wire range : 26 ~ 12 AWG

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4	4	4
Rate voltage(V)	320	250	250
Rate current(A)	18		

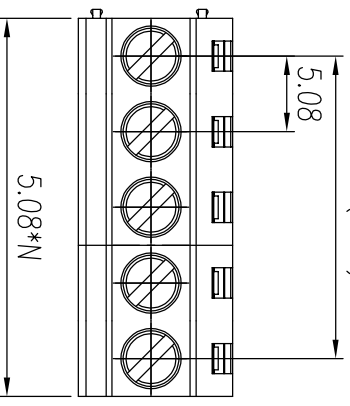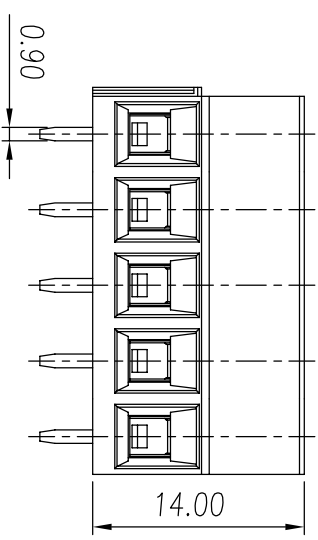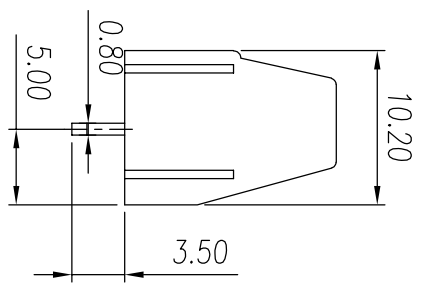

- Wire range : 0.2 ~ 2.5 mm²
- 3. Torque: 0.5 N.m(4.43lb.in)
- 4. Pitch : 5.08 mm, Poles : N=02/03 P
- 5. Stripping length : 7 ~ 8 mm
- 6. Operating temperature: -40°C~+105°C
- 7. RoHS Compliance
- 8. Material: Housing PA66,UL94V-0
Screws M3 Steel, Cr plated
Pin copper alloy, Sn plated

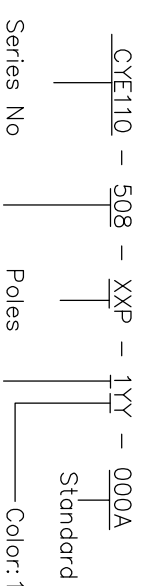

- Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

Linear dimension	≡	□	//	⊥
over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160
over 160 to 200	all	to 5	to 30	to 120
tolerance ±0.15	±0.25	±0.35	±0.45	±0.60
	±0.75	±0.90	0.5	0.025
	0.025	0.06	0.12	0.4

SIZE: A4	SCALE: 2:1	CHECKED: C. LU	APPROVED: H. JIANG
UNIT: mm	SHEET: 1/1	DATE: 04/29/2021	DATE: 04/29/2021

DRW: K. ZHAO	DATE: 04/29/2021
CHECKED: C. LU	DATE: 04/29/2021
APPROVED: H. JIANG	DATE: 04/29/2021

PART NO: CYE110-508-XXP-1YY-000A	TITLE: Fixed connector
CUSTOMER:	

Cymannu 嚙字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM