



REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	08/30/2021	

L(mm)

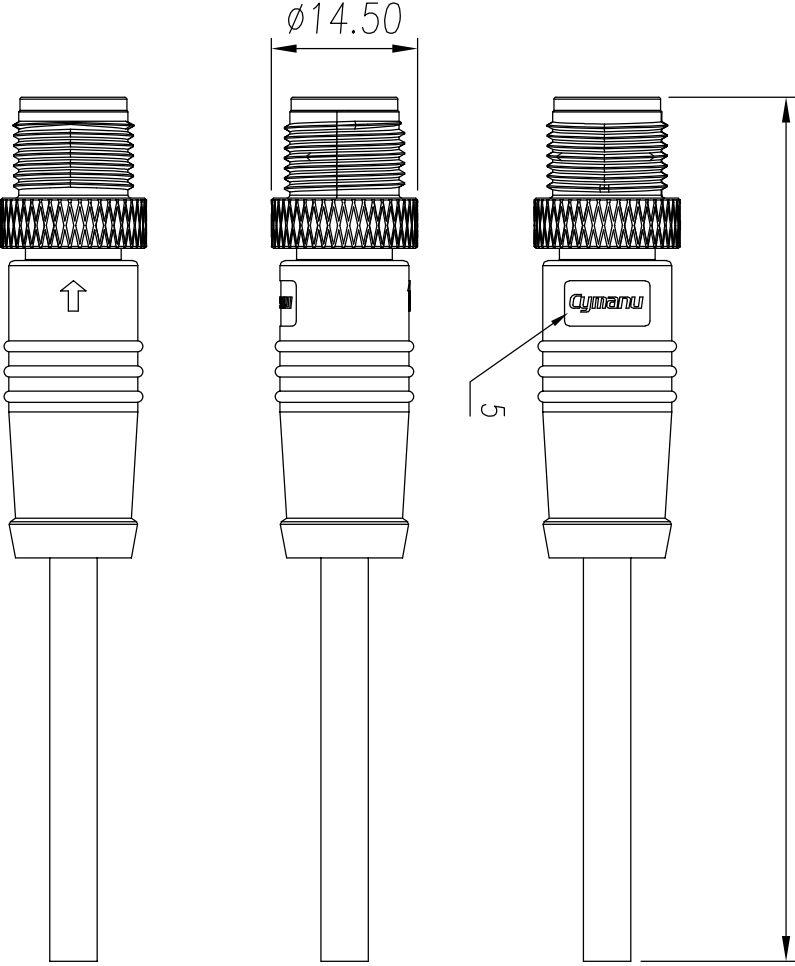

NOTES:


1. RoHS Compliant
2. Levels of protection: IP68
3. Cable: UL2517,PVC/PUR,Black
4. Operating temperature: -25℃~85℃
5. Company Logo
6. Connector tolerances:

variable range	linear dimension											
	over 18 to 10	over 30 to 10	over 50 to 30	over 80 to 50	over 120 to 80	over 160 to 120	over 160 to 160	all to 5	over 5 to 30	over 30 to 120	over 120 to 0.4	
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4

7. Cable length tolerance:

- 01~03m: ±50mm
- 04~06m: ±75mm
- 07~10m: ±100mm
- 11~20m: ±200mm
- 21~30m: ±300mm
- 31~99m: ±500mm

5	Gr-ay
4	Black
3	Blue
2	Whitr
1	Brown
PIN	WIRE



5P

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	APPROVED: H. JIANG	DATE: 08/30/2021	DATE: 08/30/2021	DATE: 08/30/2021
UNIT: mm	SHEET: 1/1	DRAWN: K. ZHAO	PART NO.: SPM-M12B-XXP-MM-SL8AXX-00AH	TITLE: M12B male Plug	CUSTOMER:	

Cymannu 唎字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM