


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	10/21/2021	/



L(mm)

39.50

5

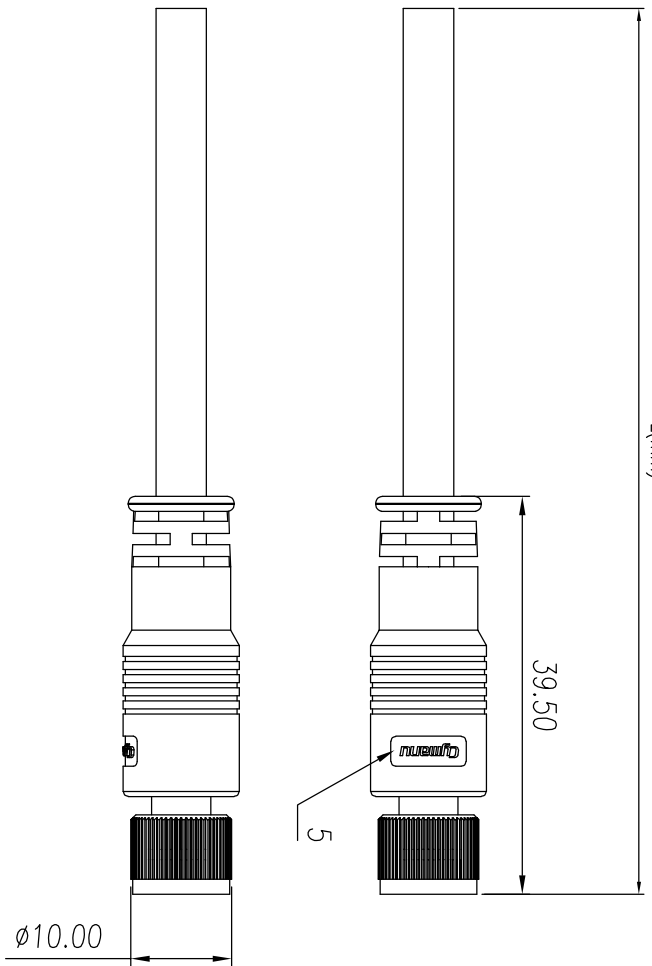

- NOTES:
1. RoHS Compliant
  2. Levels of protection: IP68
  3. Cable: UL2517,PVC/PUR,Black
  4. Operating temperature: -25°C~85°C
  5. Company Logo
  6. Connector tolerances:

variable range	linear dimension											
	over 18 to 10	over 30 to 30	over 50 to 50	over 80 to 80	over 120 to 120	over 160 to 160	all to 5	over 5 to 30	over 30 to 120	over 120 to 120		
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4

7. Cable length tolerance:

- 01~03m: ±50mm
- 04~06m: ±75mm
- 07~10m: ±100mm
- 11~20m: ±200mm
- 21~30m: ±300mm
- 31~99m: ±500mm

5PM-M8B - XXP - FF-SL8AXX - 00AH

Coding: A,B


Cable length:

Standard

Poles

99:99Meters

5	Gray
4	Yellow
3	Green
2	Brown
1	Whitr
PIN	WIRE



5P

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4:3	DRAWN: K. ZHAO	CHECKED: C. LU	DATE: 10/21/2021
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 10/21/2021	

PART NO: SPM-M8B-XXP-FF-SL8AXX-00AH
TITLE: M8B female, Plug
CUSTOMER: /

**Cymannu** 囍字電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM