
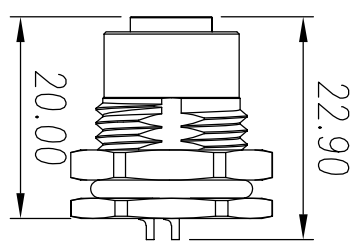


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	08/10/2021	


NOTES:

1. RoHS Compliant
 2. Levels of protection: IP67
 3. Installation mode: Solder, Front fastened
 4. Operating temperature: -40°C~105°C
 5. Applicable Panel: Panel Hole
- For Panel Thickness Max: 4.5mm

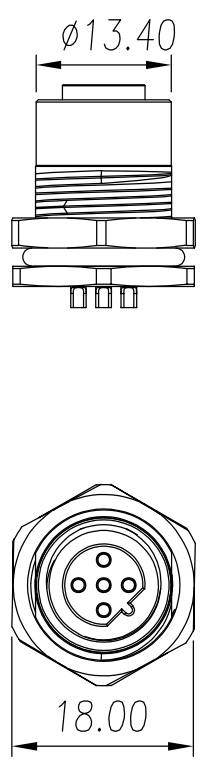

variable range	linear dimension											
	over 18 to 10	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	all	over 5 to 30	over 30 to 120	over 120 to 160	over 160 to 200		
to 10	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4

S5D-M12B - XXP - FF-SL7001 - 00AH
 Coding: A,B,D
 Poles
 Thread type: 000: PG9
 001: M16*1.5
 Standard

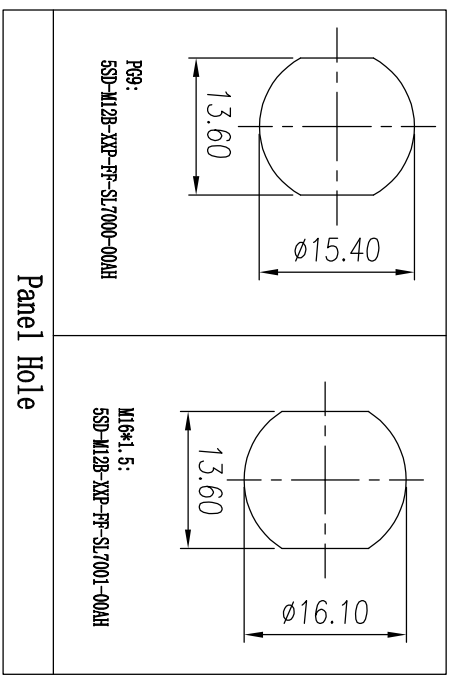

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	DATE: 08/10/2021	PART NO.: S5D-M12B-XXP-FF-SL7001-00AH	<p>NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymannu.com WWW.CYMANNU.COM</p>
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 08/10/2021	TITLE: M12B female, Front Fastened Socket	