
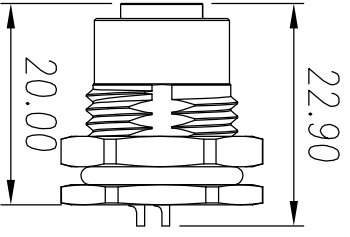




REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	08/17/2021	

- NOTES:
- 1.RoHS Compliant
 - 2.Levels of protection: IP67
 - 3.Installation mode: Solder, Front fastened
 - 4.Operating temperature: -40°C~105°C
 - 5.Applicable Panel: Panel Hole
- For Panel Thickness Max: 4.5mm
- 6.Connector tolerances:

linear dimension	≡		□		//		⊥					
	over	under	over	under	over	under	over	under				
variable range	18	30	50	80	120	160	all	5	30	120		
to	10	30	50	80	120	160	5	30	120			
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4



5SD-M12D - XXP - FF-SL7001 - 00AH
 Coding: A,B,D
 Poles
 Thread type:
 000: PC9
 001: M16*1.5
 Standard

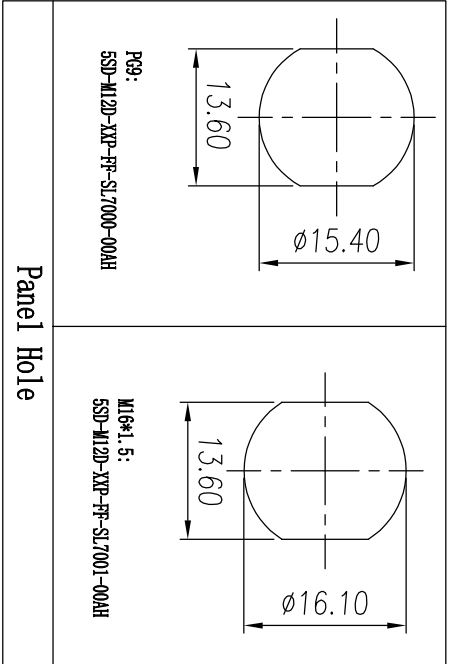

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	DATE: 08/17/2021
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 08/17/2021

PARA. NO.: SSSD-M12D-XXP-FF-SL7001-00AH
TITLE: M12D female Front Fastened Socket
CUSTOMER:

Cymannu 嚒字電子

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD
 Email: sales@cymannu.com
 WWW.CYMANNU.COM