


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	10/21/2021	/

NOTES:

1. RoHS Compliant
2. Levels of protection: IP67
3. Installation mode: Solder, Front fastened
4. Operating temperature: -40°C~105°C
5. Applicable Panel: Panel Hole
6. Connector tolerances: For Panel Thickness Max: 4.5mm

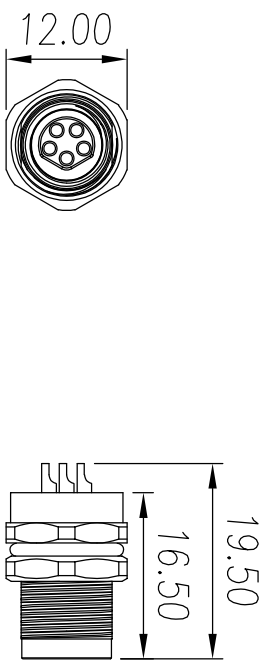



Variable range	linear dimension											
	to 10	to 30	to 50	to 80	to 120	to 160	to 180	to 30	to 50	to 120		
tolerance	±0.15	±0.25	±0.35	±0.55	±0.80	±1.05	±1.30	0.5	0.025	0.06	0.12	0.4

5SD-M8B - XXP - FF-SL7000 - 00AH

Standard

Coding: A/B

Poles



Panel Hole

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE:	SCALE:	CHECKED:	DATE:	PART NO.:	TITLE:
A4	4 : 3	K. ZHAO	10/21/2021	S5D-M8B-XXP-FF-SL7000-00AH	M8B female, Front Fastened Socket
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 10/21/2021	CUSTOMER: /	

**Cymannu** 矽宇電子  
 NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD  
 Email: sales@cymannu.com WWW.CYMANNU.COM