
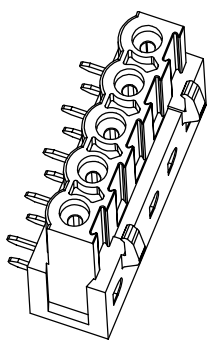
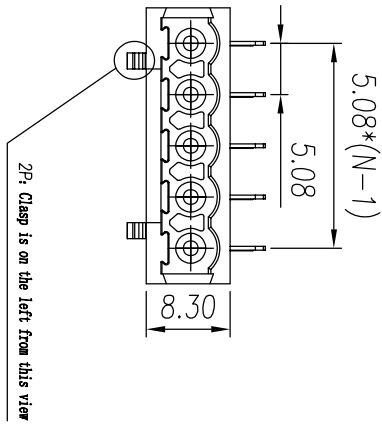
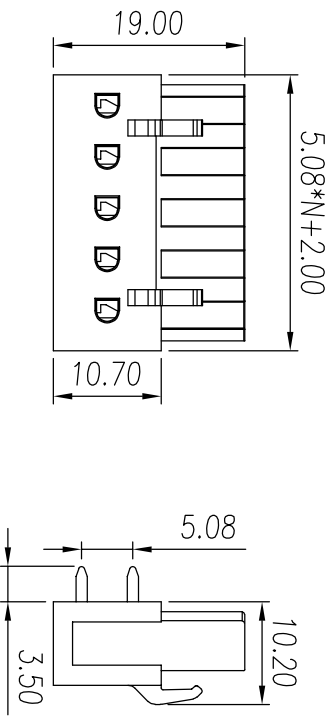


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	07/12/2021	

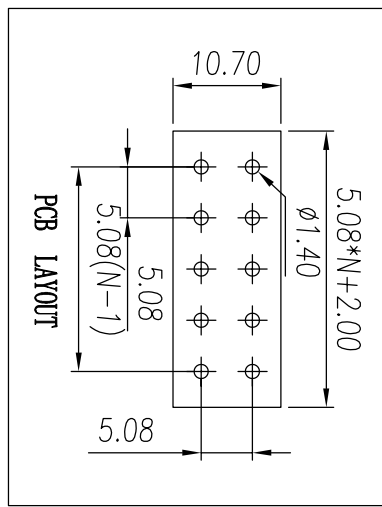


NOTES:
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	15	/	15
Rate impulse voltage(KV)	1.6		

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4	4	4
Rate voltage(V)	630	320	320
Rate current(A)	20		

- 3. Pitch : 5.08 mm
- 4. Operating temperature: -40°C~+105°C
- 5. RoHS Compliance
- 6. Material: Housing PA66,UL94V-0
Pin copper alloy,Sn plated

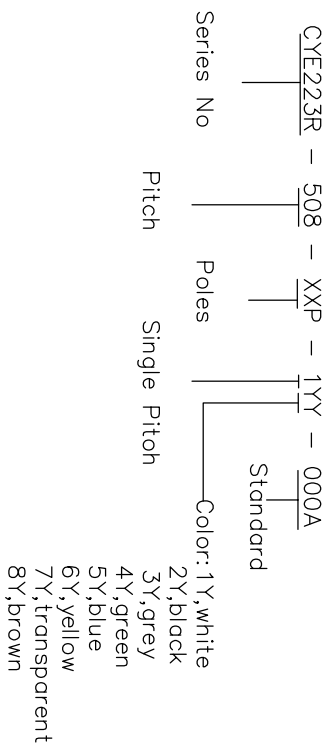

Remark: This drawing is a controlled document for Cymann. All specifications are subject to change without prior notice.

	linear dimension										≡	—	□	//	⊥	
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to				
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4				

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	APPROVED: H. JIANG	DATE: 07/12/2021	DATE: 07/12/2021	DATE: 07/12/2021	DATE: 07/12/2021
UNIT: mm	SHEET: 1 / 1	DRAWN: K. ZHAO	CUSTOMER: NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD	PART NO.: CYE223R-508-XXP-1YY-000A	TITLE: Plug in connector	Customer's	

Cymannu 囍字电子

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM