
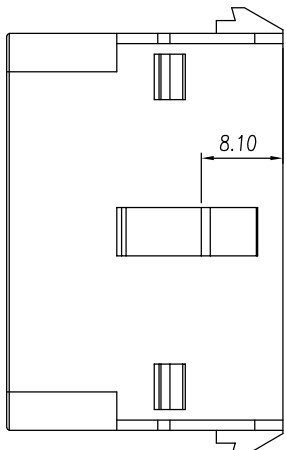

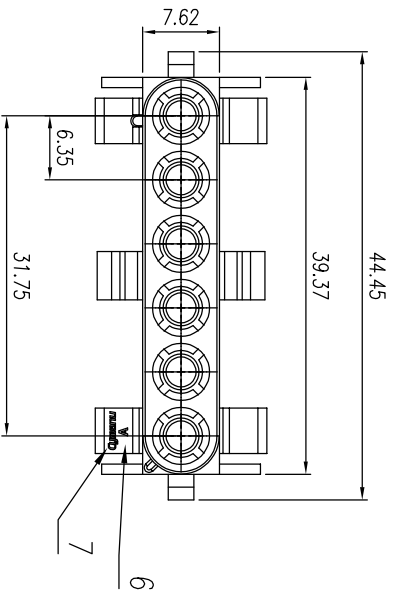
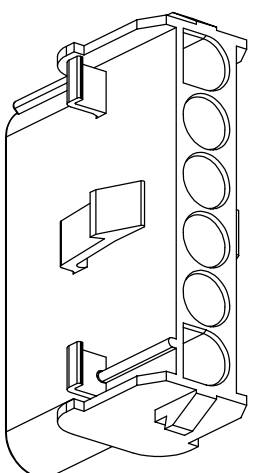


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/16/2021	

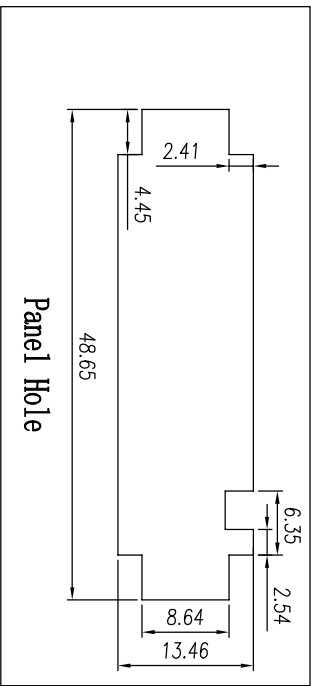

NOTES:

- 1.Pitch : 6.35 mm, Poles : N= 06 P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance
- 4.Material: Housing Halogen free PA66,UL94V-0
- 5.Applicable Panel:Panel Hole  
Panel Thickness t=1.0~2.3
- 6.Movlp Cavity-Marking
- 7.Company Logo

43010806YY10A  
Standard

Series No  
Color: 1Y, white  
2Y, black  
3Y, grey  
4Y, green  
5Y, blue  
6Y, yellow  
7Y, transparent  
8Y, brown

linear dimension

tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4
over	18	30	50	80	120	160	200	all	5	30	120	over
to	10	30	50	80	120	160	200	5	30	120	to	over

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	DATE: 12/16/2021	PART NO: 43010806YY10A
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 12/16/2021	TITLE: Connector sheath

**Cymannu** 矽宇電子  
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD  
Email: sales@cymannu.com WWW.CYMANNU.COM