
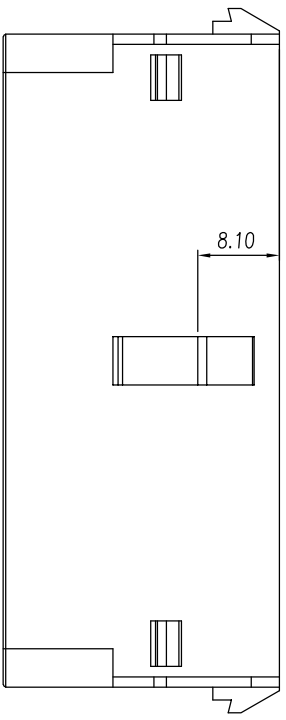
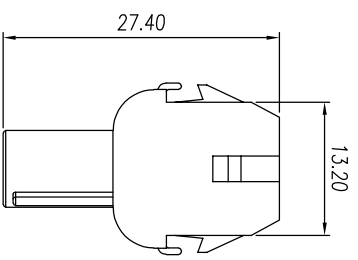
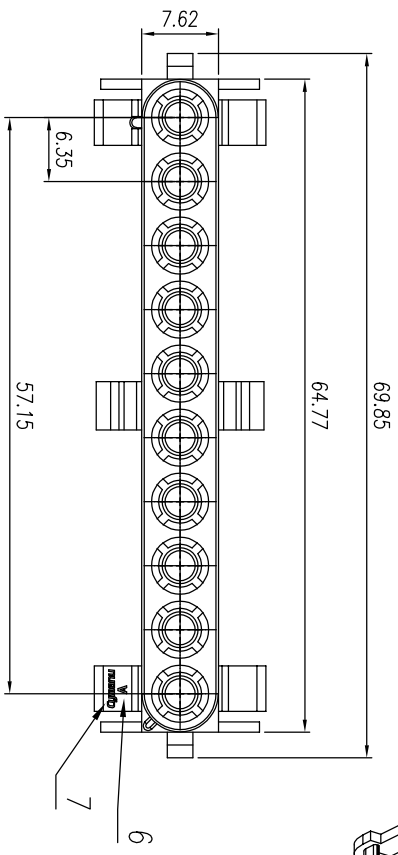
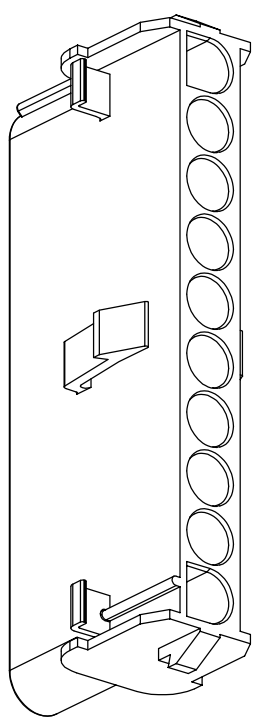


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/25/2021	

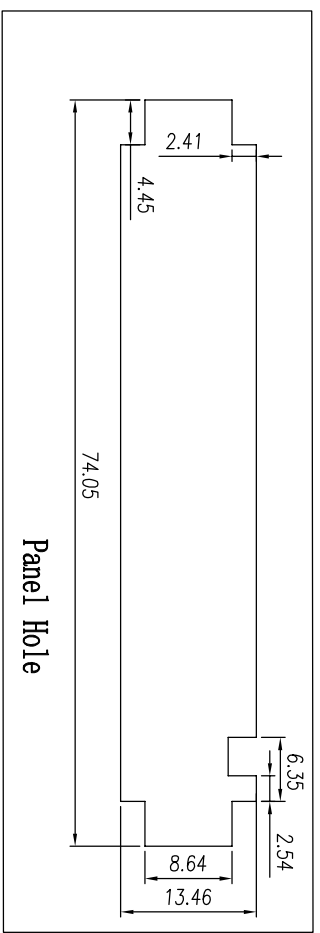

NOTES:

- 1.Pitch : 6.35 mm, Poles : N=10 P
 - 2.Operating temperature: -40°C~+105°C
 - 3.RoHS Compliance
 - 4.Material:Housing Halogen free PA66,UL94V-0
 - 5.Applicable Panel:Panel Hole
Panel Thickness t=1.0~2.3
 - 6.Movp Cavity-Marking
 - 7.Company Logo
- 43010810YY10A _____ Standard
- Series No _____
- Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

tolerance	linear dimension										≡	—	□	//	⊥	
	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06						0.12
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to				

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	DATE: 12/25/2021	PART NO: 43010810YY10A	
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 12/25/2021	TITLE: Connector sheath	

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM