


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/04/2021	




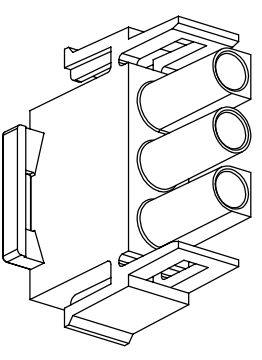


NOTES:


1. Pitch : 6.35 mm, Poles : N=03 P
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Material: Housing PA66,UL94V-0

43020803YY10A
Standard

Series No
Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

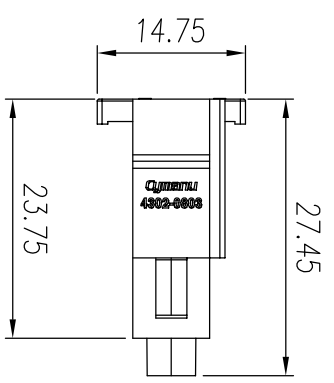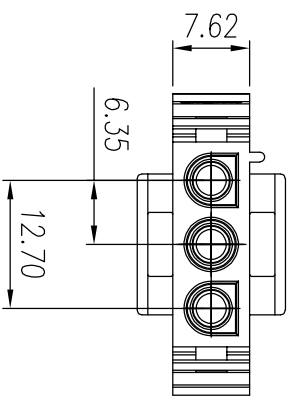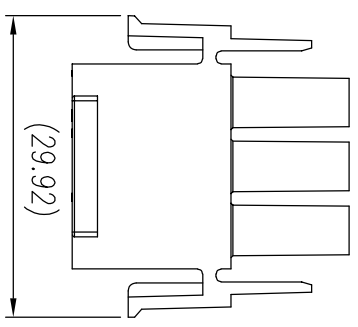

43020803YY20A



43020803YY10A

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

Linear dimension	≡	□	∥	⊥
over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160
over 160 to 200	all	to 5	over 5 to 30	over 30 to 120
tolerance ±0.15	±0.25	±0.35	±0.45	±0.60
	±0.75	±0.90	0.5	0.025
			0.06	0.12
				0.4

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	DATE: 12/04/2021
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 12/04/2021

DRAWN: K. ZHAO	DATE: 12/04/2021
CHECKED: C. LU	DATE: 12/04/2021
APPROVED: H. JIANG	DATE: 12/04/2021

PART NO: 43020803YY10A	TITLE: Connector sheath
CUSTOMER:	

Cymannu 嚒字電子

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM