
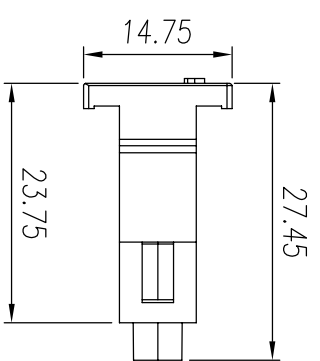

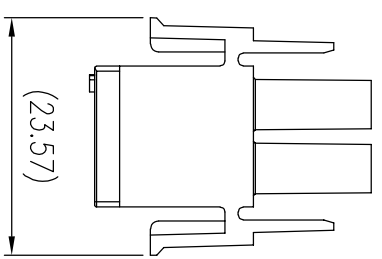


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/04/2021	



NOTES:

1. Pitch : 6.35 mm, Poles : N=02 P
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Material: Housing PA66,UL94V-0


43020802YY10A

Standard


Series No

Color: 1Y, white

- 2Y, black
- 3Y, grey
- 4Y, green
- 5Y, blue
- 6Y, yellow
- 7Y, transparent
- 8Y, brown



43020802YY20A



43020802YY10A

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

		linear dimension										
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	
	tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12

SIZE: A4	SCALE: 4 : 3	CHECKED: C. LU	DATE: 12/04/2021
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 12/04/2021

PARA. NO.: 43020802YY10A	TITLE: Connector sheath
CUSTOMER:	

Cymannu 嚒字電子

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM