

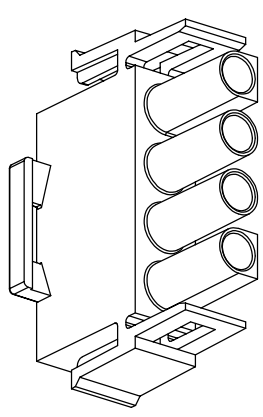
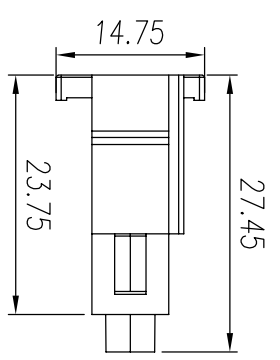


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2021	

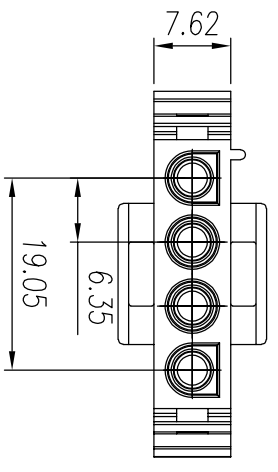

NOTES:

1. Pitch : 6.35 mm, Poles : N=04 P
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Material: Housing PA66,UL94V-0


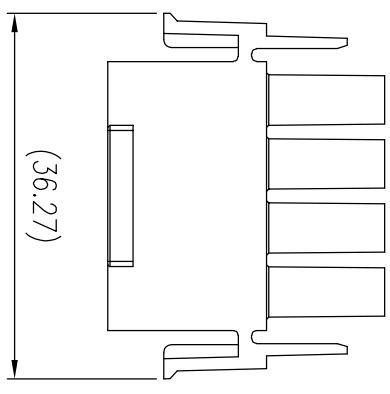


Series No \_\_\_\_\_  
 Color: 1Y, white  
 2Y, black  
 3Y, grey  
 4Y, green  
 5Y, blue  
 6Y, yellow  
 7Y, transparent  
 8Y, brown

Standard

43020804YY20A

43020804YY10A



Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

Linear dimension	≡	—	□	//	⊥
over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200
tolerance ±0.15	±0.25	±0.35	±0.45	±0.60	±0.75
all	to 5	to 5	to 30	to 30	to 120
0.5	0.025	0.06	0.12	0.4	

SIZE: A4	SCALE: 4:3	CHECKED: C. LU	DATE: 12/10/2021	PART NO.: 43020804YY10A
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 12/10/2021	TITLE: Connector sheath

**Cymannu** 嚒字電子

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD  
 Email: sales@cymannu.com WWW.CYMANNU.COM