

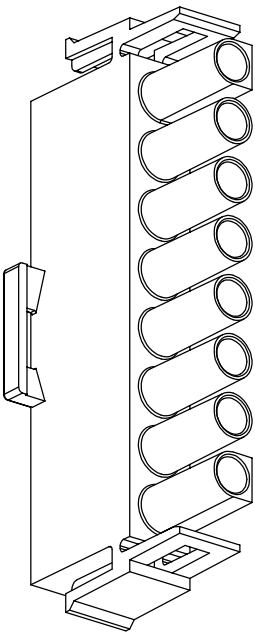


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2021	



NOTES:

- 1.Pitch : 6.35 mm, Poles : N= 08 P
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance
- 4.Material: Housing PA66,UL94V-0

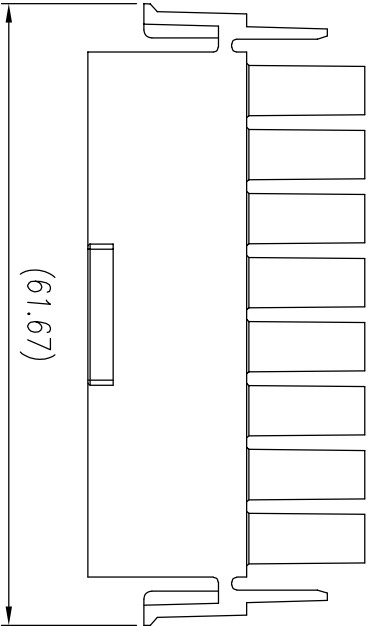

43020808YY10A
Standard

Series No

Color: 1Y, white

2Y, black

3Y, grey




4Y, green

5Y, blue

6Y, yellow

7Y, transparent

8Y, brown

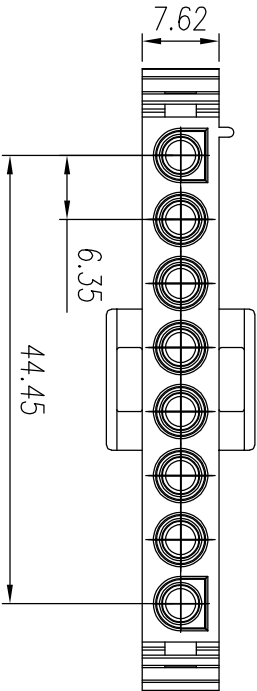

43020808YY20A

43020808YY10A

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension													
over	over	over	over	over	over	over	over	over	all	to	over	over	over
18 to 30	30 to 50	50 to 80	80 to 120	120 to 160	160 to 200	0.5	0.025	0.06	0.12	0.4			
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4	

SIZE: A4	SCALE: 4 : 3	DRAWN: K. ZHAO	DATE: 12/10/2021	PART NO: 43020808YY10A
UNIT: mm	SHEET: 1 / 1	CHECKED: C. LU	DATE: 12/10/2021	TITLE: Connector sheath
		APPROVED: H. JIANG	DATE: 12/10/2021	CUSTOMER: