

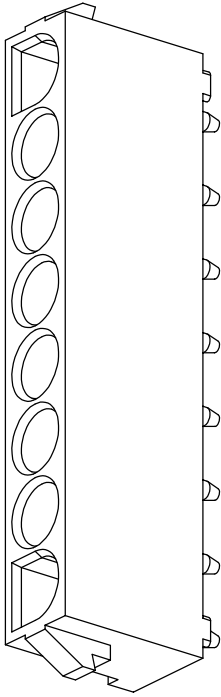
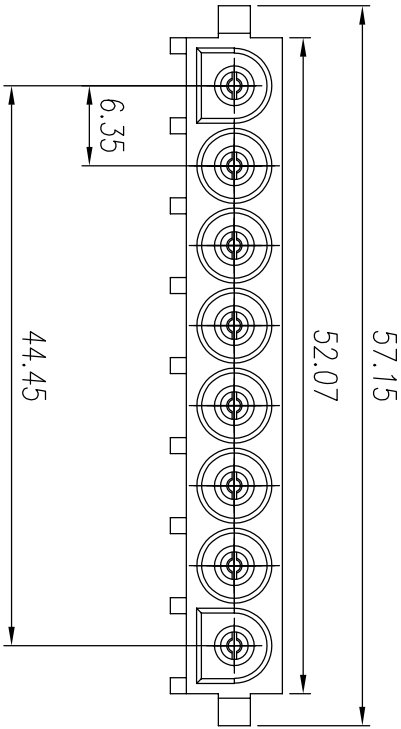


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2020	



NOTES:

- 1.Pitch : 6.35 mm, Poles : N= 08 P
- 2.Rate voltage(V): 600 ,Rate current(A):12
- 3.Operating temperature: -40°C~+105°C
- 4.Diameter for matched male terminal: 2.13mm
- 5.RoHS Compliance
- 6.Material:Housing PA66,UL94V-0
Pin Phosphor bronze,Sn plated

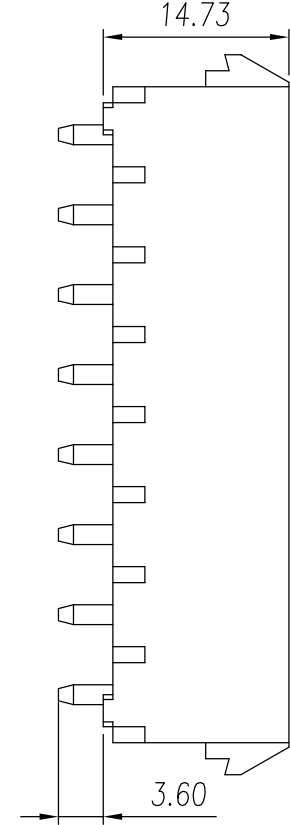

43000808YY10C
Series No
Color: 1Y,white
2Y,black
3Y,grey
4Y,green
5Y,blue
6Y,yellow
7Y,transparent
8Y,brown

Standard

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension												≡	—	□	//	⊥
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4				
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120					

SIZE: A4	SCALE: 5 : 3	DRAWN: K. ZHAO	DATE: 12/10/2021	PART NO: 43000808AYY10C
UNIT: mm	SHEET: 1 / 1	CHECKED: C. LU	DATE: 12/10/2021	TITLE: PCB connector
		APPROVED: H. JIANG	DATE: 12/10/2021	CUSTOMER: