

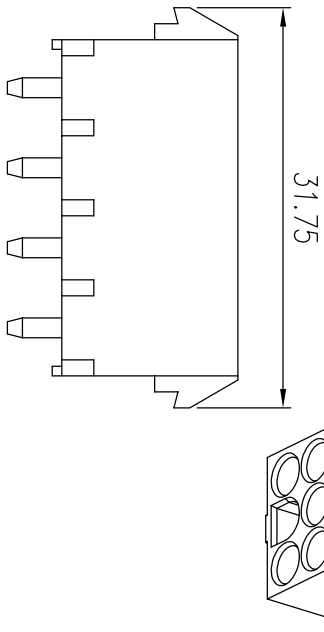


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	12/10/2020	

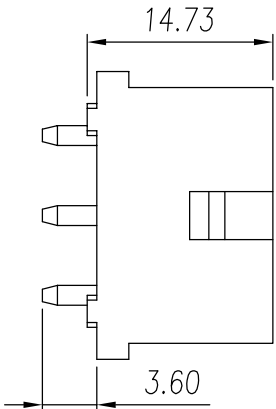

NOTES:

- 1.Pitch : 6.35 mm, Poles : N=04*3 P
- 2.Rate voltage(V): 600 ,Rate current(A):12
- 3.Operating temperature: -40°C~+105°C
- 4.Diameter for matched male terminal: 2.13mm
- 5.RoHS Compliance
- 6.Material:Housing PA66,UL94V-0
Pin Phosphor bronze,Sn plated

43000812HY10C

Standard

Series No

Color: 1Y, white

2Y, black

3Y, grey



4Y, green

5Y, blue

6Y, yellow

7Y, transparent

8Y, brown

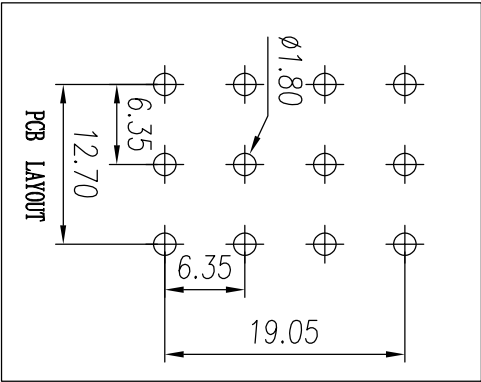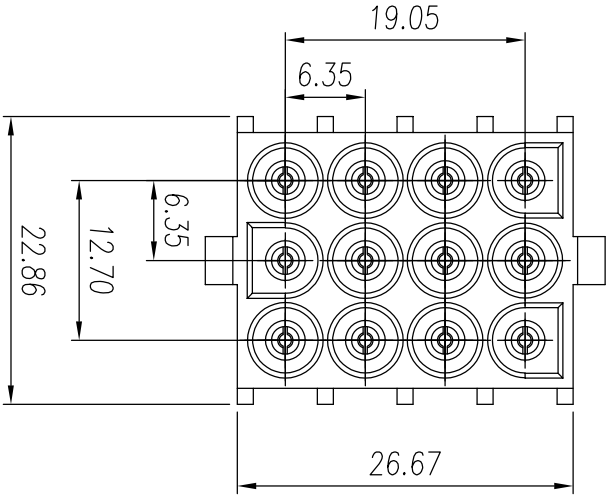

Remark: This drawing is a controlled document for Cymann. All specifications are subject to change without prior notice.

linear dimension												≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all to 5	over 5 to 30	over 30 to 120	over 120 to 160					
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12					0.4

SIZE: A4	SCALE: 5 : 3	CHECKED: C. LU	DATE: 12/10/2021	DRAWN: K. ZHAO	DATE: 12/10/2021	PART NO: 43000812HY10C
UNIT: mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 12/10/2021			TITLE: PCB connector
						CUSTOMER: