


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/06/2022	

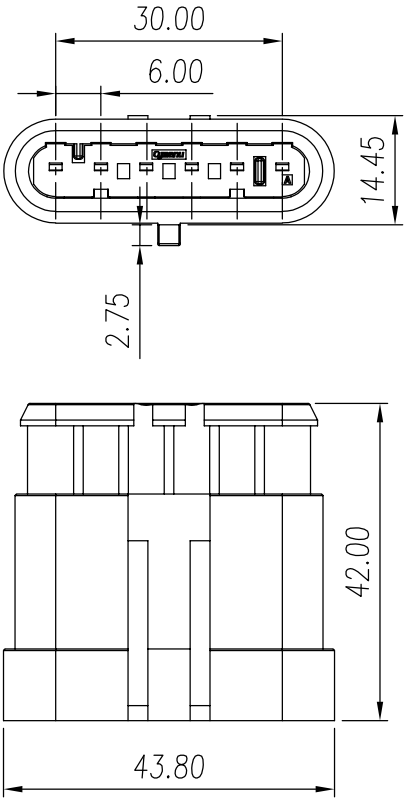

NOTES:


1. Poles : N= 06 P
- 2.Operating temperature: -40℃~+125℃
- 3.RoHS Compliance
- 4.Material:

Housing Halogen free PA66-GF,UL94V-0
PLR Halogen free PA66-GF,UL94V-0

5.Company Logo

63410606YY10B
Standard

Series No
Color: 1Y,white
2Y,black
3Y,greY
4Y,green
5Y,blue
6Y,yellow
7Y,transparent
8Y,brown

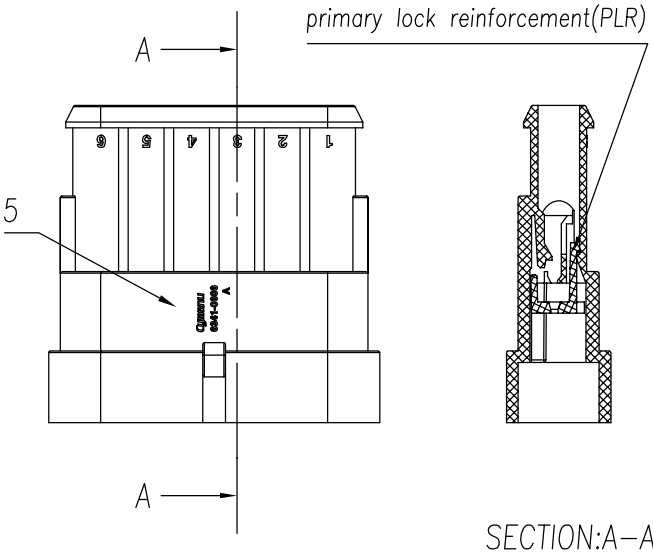




SECTION:A-A

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4




Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.

		DRAWN: K. ZHAO	DATE: 09/06/2022	PART NO: 63410606YY10B	 Cymanu® 賜宇電子 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymanu.com WWW.CYMANU.COM
SIZE: A4	SCALE: 1 : 1	CHECKED: C. LU	DATE: 09/06/2022	TITLE: Connector sheath	
UNIT:mm	SHEET: 1 / 2	APPROVED: H. JIANG	DATE: 09/06/2022	CUSTOMER:	

REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/06/2022	

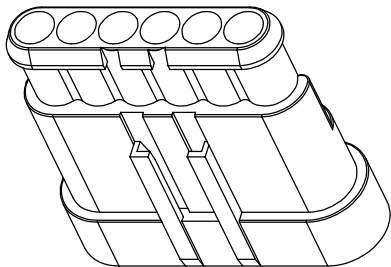

63410606YY11B

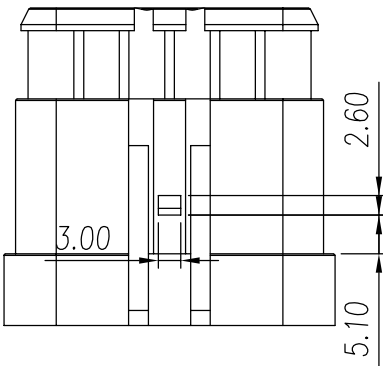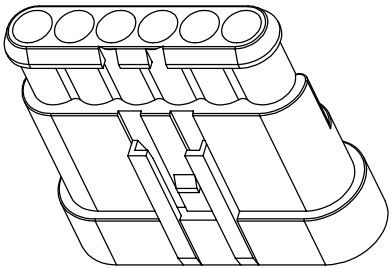

63410606YY12B

linear dimension								≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.

		DRAWN: K. ZHAO	DATE: 09/06/2022	PART NO: 63410606YY10B	 Cymanu 暢宇電子 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymanu.com WWW.CYMANU.COM
SIZE: A4	SCALE: 1 : 1	CHECKED: C. LU	DATE: 09/06/2022	TITLE: Connector sheath	
UNIT:mm	SHEET: 2 / 2	APPROVED: H. JIANG	DATE: 09/06/2022	CUSTOMER:	