


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	11/16/2021	

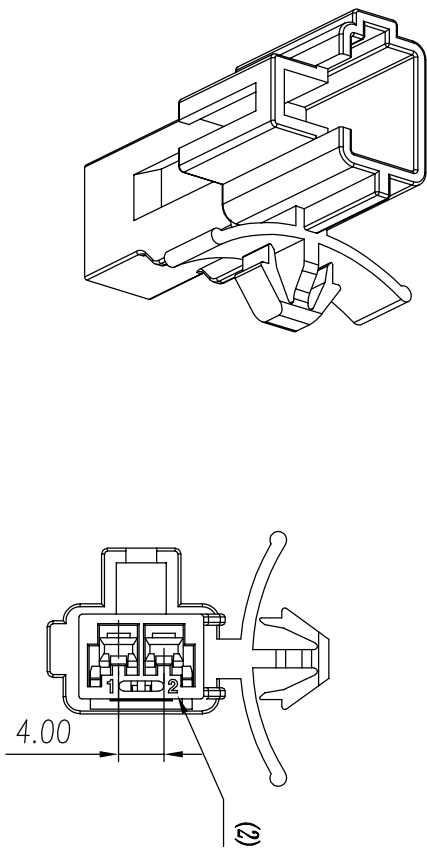


NOTES:

- 1.Pitch : 4.0 mm, Poles : N=02 P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance
- 4.Material:Housing 1 PA66,UL94V-0
Housing 2 PA66,UL94V-0
- 5.Applicable Panel:Panel Hole Dia ϕ 7.0
Panel Thickness $t=0.6\sim 2.2$

- (1)Company Logo
(2)Cavity-Marking
(3)Mold Cavity-Marking

63010302YY10B
Series No
Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown
Standard

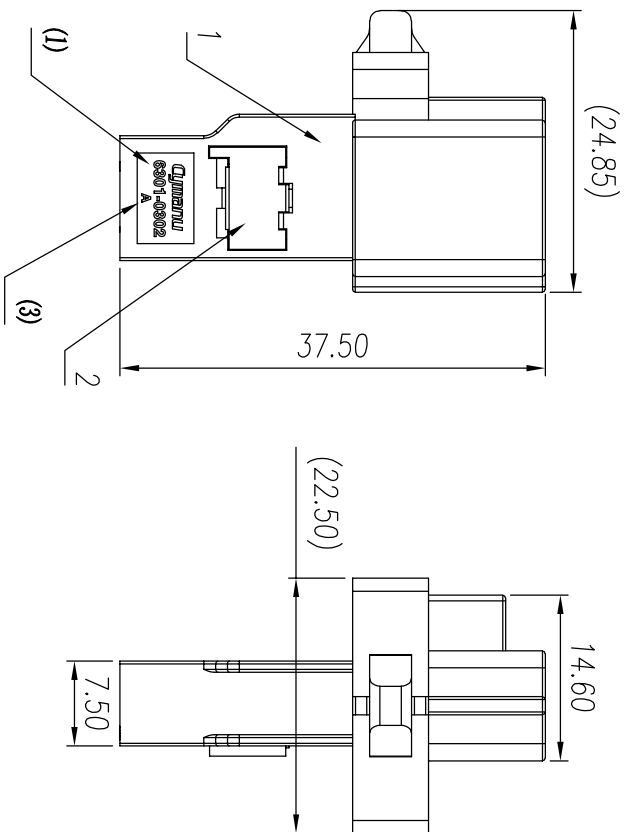

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension										≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120			
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4		

SIZE: A4		SCALE: 3 : 2		CHECKED: C. LU		DATE: 11/16/2021		PART NO.: 63010302YY10B	
UNIT: mm		SHEET: 1 / 1		APPROVED: H. JIANG		DATE: 11/16/2021		TITLE: Connector sheath	
								CUSTOMER:	

Cymannu 暢宇電子

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com WWW.CYMANNU.COM