

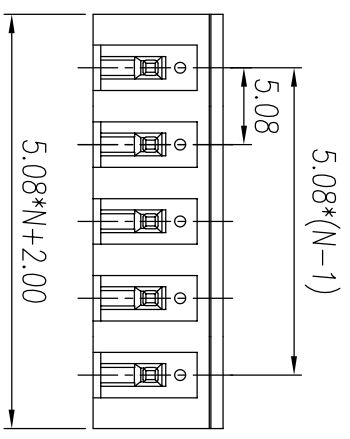
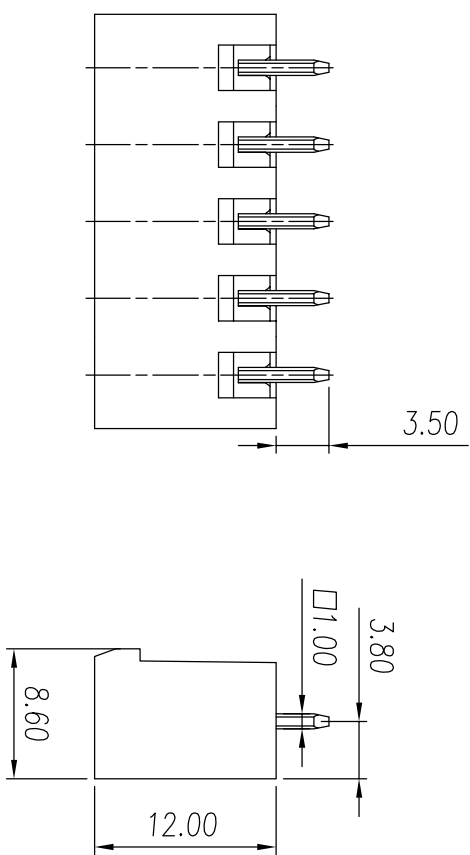


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/25/2021	

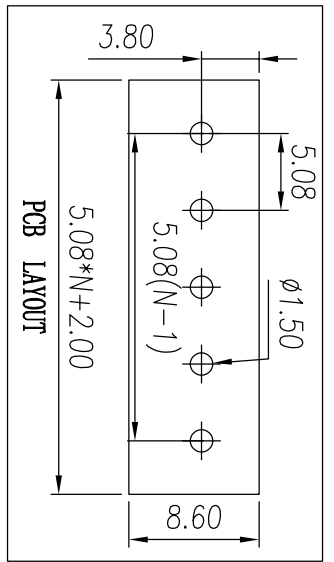

NOTES:
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	15	/	10
Rate impulse voltage(KV)	1.6		

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4	4	4
Rate voltage(V)	320	320	250
Rate current(A)	15		

- 3. Pitch : 5.08 mm
- 4. Operating temperature: -40°C~+105°C
- 5. RoHS Compliance
- 6. Material: Housing PA66,UL94V-0
Pin copper alloy,Sn plated

CYE220VC - 508 - XXP - 1YY - 000A
Series No Poles Standard
Pitch Single Pitch

- Color: 1Y, white
2Y, black
3Y, grey
4Y, green
5Y, blue
6Y, yellow
7Y, transparent
8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

variable range	linear dimension										≡	□	//	⊥
	over 10 to	over 18 to	over 30 to	over 50 to	over 80 to	over 120 to	over 160 to	over 200 to	all 5 to	over 5 to				
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4		

SIZE: A4	SCALE: 2:1	CHECKED: C. LU	DATE: 05/25/2021
UNIT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 05/25/2021

PART NO: CYE220VC-508-XXP-1YY-000A	TITLE: Plug in connector
DATE: 05/25/2021	CUSTOMER:

Cymannu 囍字電子
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM