
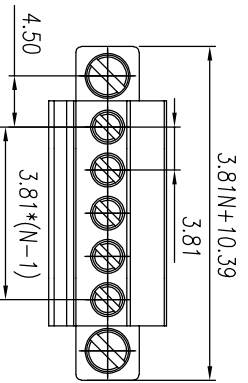




REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/18/2021	

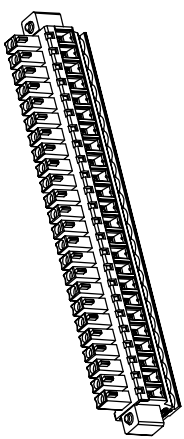

NOTES:  
1. UL Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	8	/	8
Rate impulse voltage(KV)	1.6		


Wire range : 26 ~ 16 AWG

2. IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	7		

Wire range : 0.2 ~ 1.5 mm<sup>2</sup>

- Torque: 0.2 N.m (1.7 Lb.in)
- Pitch : 3.81 mm, Poles : N=02~24P
- Stripping length : 6 ~ 7 mm
- Operating temperature: -40°C ~ +105°C
- RoHS Compliance
- Material: Housing PA66, UL94V-0
- Screws M2 Steel/ Cr plated
- Clamp copper alloy, Sn plated
- Cage copper alloy, Ni plated

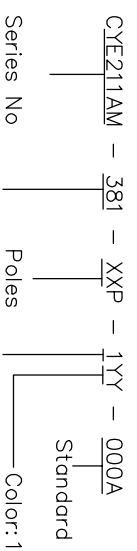

- Color: 1Y, white  
2Y, black  
3Y, grey  
4Y, green  
5Y, blue  
6Y, yellow  
7Y, transparent  
8Y, brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension	≡	—	□	//	⊥
over 18 to 30	over 50 to 80	over 120 to 160	over 160 to 200	all 5 to 30	over 50 to 120
tolerance ±0.15	±0.25	±0.35	±0.45	±0.60	±0.75
	±0.90	0.5	0.025	0.06	0.12
					0.4

SIZE:	SCALE:	CHECKED:	DATE:
A4	3 : 2	C. LU	05/18/2021
UNIT: mm	SHEET:	APPROVED:	DATE:
1 / 1	1 / 1	H. JIANG	05/18/2021

PARAM:	DATE:	PART NO.:
K. ZHAO	05/18/2021	CYE211AM-381-XXP-1YY-000A
TITLE:	DATE:	CUSTOMER:
Plug in connector	05/18/2021	

**Cymannu** 囍字電子  
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD  
Email: sales@cymannu.com WWW.CYMANNU.COM