
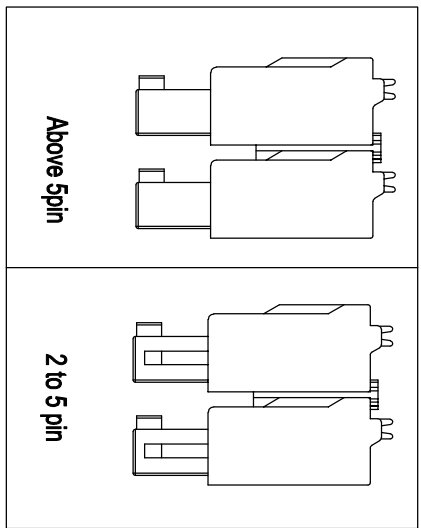
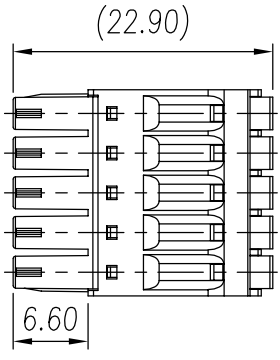
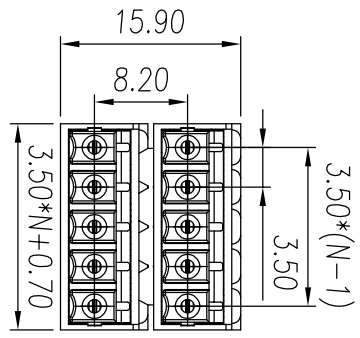


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	05/18/2021	



NOTES:


- UL Standard
- IEC Standard

Application	B	C	D
Rate voltage(V)	300	/	300
Rate current(A)	8	/	8
Rate impulse voltage(KV)	1.6		

Wire range : 26 ~ 16 AWG

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5	2.5	2.5
Rate voltage(V)	250	160	160
Rate current(A)	7		

- Wire range : 0.2 ~ 1.5 mm²
- Pitch : 3.50 mm, Poles : N = 2*2 ~ 24*2 P
- Stripping length : 8 ~ 10mm
- Operating temperature: -40°C~+105°C
- RoHS Compliance
- Material: Housing PA66,UL94V-0
Clamp copper alloy,Sn plated

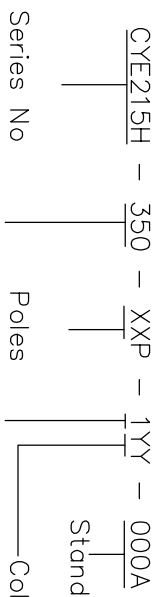

- Series No Pitch Single Pitch Color: 1Y,white
2Y,black
3Y,gray
4Y,green
5Y,blue
6Y,yellow
7Y,transparent
8Y,brown

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension		≡		—		□		//		⊥	
variable range	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	5 to 5	over 5 to 30	over 30 to 120	over 120 to 200
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12 0.4

SIZE: A4	SCALE: 3 : 2	CHECKED: C. LU	APPROVED: H. JIANG	DATE: 05/18/2021	DATE: 05/18/2021	DATE: 05/18/2021
UNIT: mm	SHEET: 1 / 1	PART NO: CYE215H-350-XXP-1YY-000A		TITLE: Plug in connector		

Cymannu 囍字電子
NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymannu.com WWW.CYMANNU.COM