
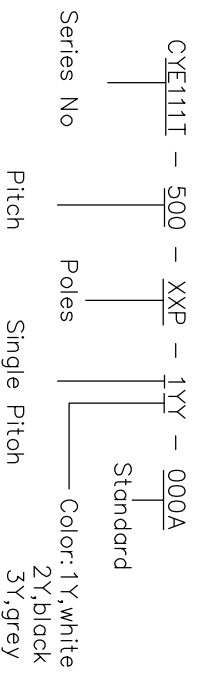
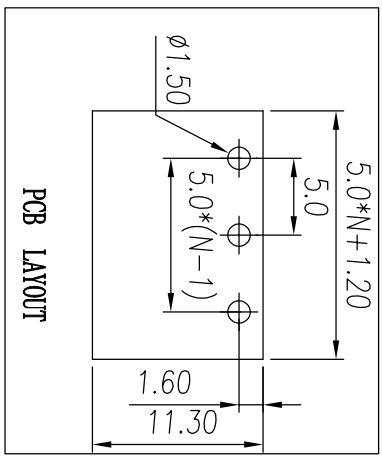


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	04/29/2021	

- NOTES:
- UL Standard
- | Application | B | C | D |
|--------------------------|-----|---|-----|
| Rate voltage(V) | 300 | / | 300 |
| Rate current(A) | 16 | / | 10 |
| Rate impulse voltage(KV) | 1.6 | | |
- Wire range : 26 ~ 12 AWG
- IEC Standard
- | Pollution degree | 2 | 2 | 3 |
|--------------------------|-----|-----|-----|
| Overvoltage category | II | III | III |
| Rate impulse voltage(KV) | 4 | 4 | 4 |
| Rate voltage(V) | 320 | 250 | 250 |
| Rate current(A) | 18 | | |

- Wire range : 0.2 ~ 2.5 mm²
- Torque: 0.5 N.m(4.43lb.in)
 - Pitch : 5.0 mm, Poles : N=02/03 P
 - Stripping length : 7 ~ 8 mm
 - Operating temperature: -40°C~+105°C
 - RoHS Compliance
 - Material: Housing PA66,UL94V-0
 - Screws M3 Steel,Or plated
 - Pin copper alloy,Sn plated

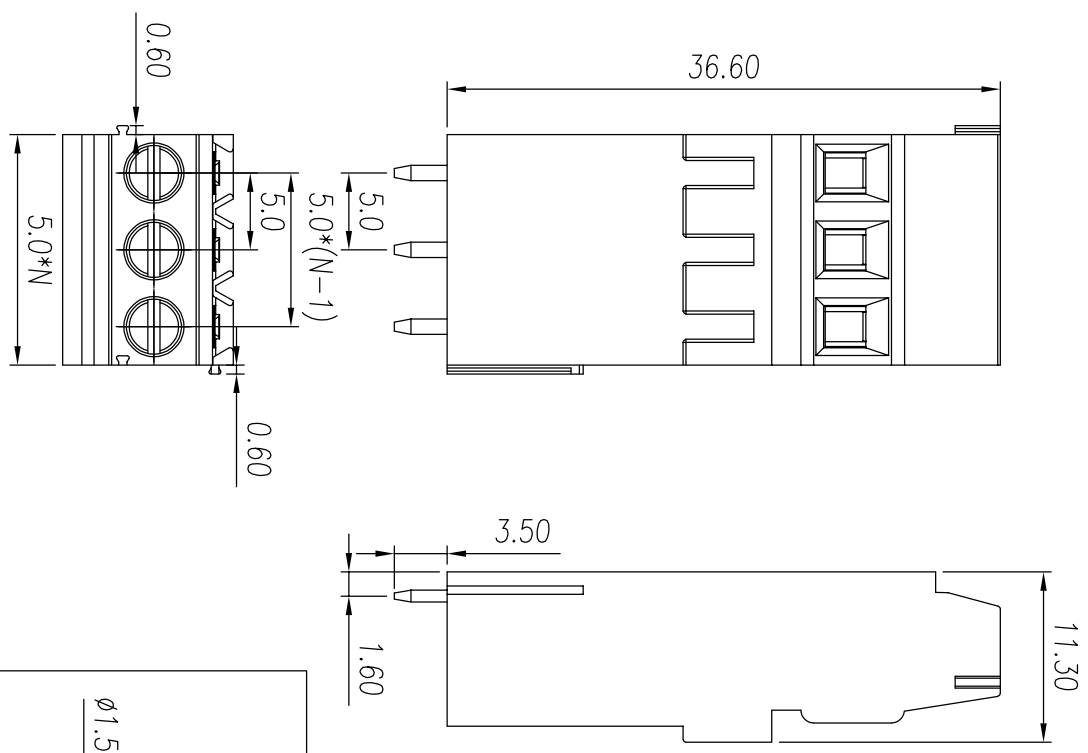

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

linear dimension	≡	□	//	⊥
over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160
over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200
all	to 5	to 5	to 30	to 120
0.5	0.025	0.06	0.12	0.4

SIZE	SCALE	CHECKED	DATE	DATE	DATE
A4	2 : 1	C. LU	04/29/2021	04/29/2021	04/29/2021

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD

 Email: sales@cymannu.com

 WWW.CYMANNU.COM