

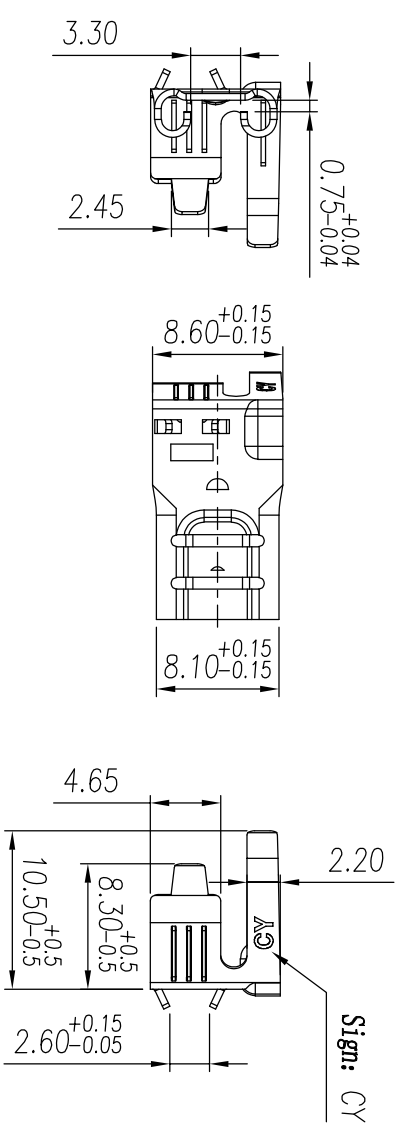
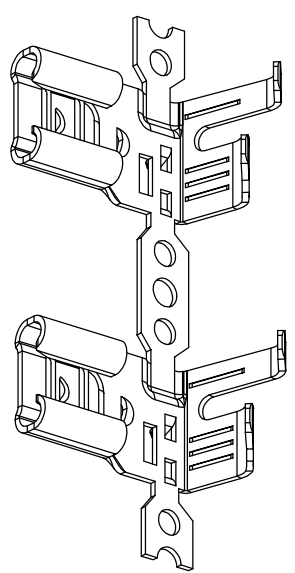


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	10/11/2022	

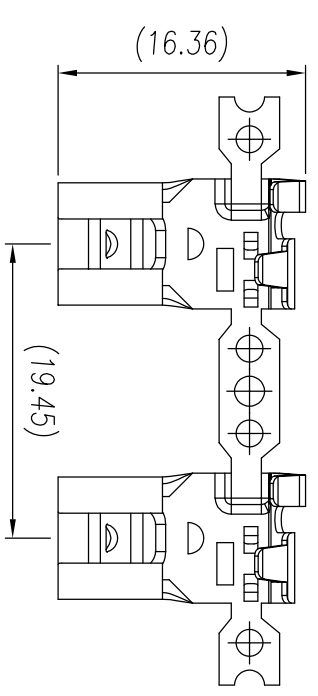

NOTES:

1. Wire range : 0.8 ~ 2.0mm<sup>2</sup>, 18 ~ 14 AWG  
Insulation diameter: 1.9~4.1 mm
2. Rate current(A): 15 max
3. Operating temperature: -40°C~+105°C
4. RoHS Compliance
5. Material: copper alloy, Sn plated
6. Mating Tab Size : 6.3\*0.8
7. Mating Force: 24.5N~50N  
Pullout Force: 38N~53N

32106301010SN  
Electroplate:  
SN, Tin  
Ni, Nickel  
AU, Gold  
Series No  
Stand

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

tolerance	linear dimension										≡	—	□	//	⊥	
	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all 0.5 to 5	over 5 to 30	over 30 to 120						
±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4					

SIZE: A4	SCALE: 2:1	CHECKED: C. LU	DATE: 10/11/2022
UNTT: mm	SHEET: 1/1	APPROVED: H. JIANG	DATE: 10/11/2022

PARAM: K. ZHAO	DATE: 10/11/2022	PART NO.: 32106301010SN
TITLE: Quick-connect /6.3*0.8Female/Flag	DATE: 10/11/2022	CUSTOMER:

**Cymannu** 嚒字電子  
NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD  
Email: sales@cymannu.com WWW.CYMANNU.COM