



Number of Positions	4P	
Coding		
Current/Voltage	4A/250V	
Voltage Proof	1.4kV	
Rated Impulse Voltage	2.5kV	
Wire specifications	0.34mm ² /22AWG	
Wire Color	PIN	WIRE
	1	Brown
	2	White
	3	Blue
	4	Black

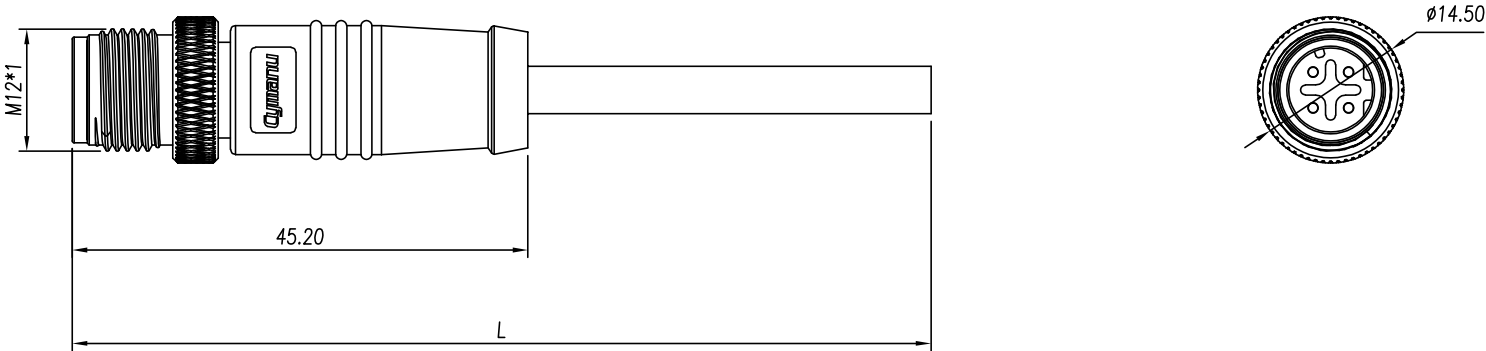

Technical Parameter:

- 1.Insulation Resistance: ≥100MΩ
- 2.Contact Resistance: ≤10mΩ
- 3.Durability: ≥100 cycles
- 4.Locking Torque: 0.4Nm
- 5.Compliant with RoHS
- 6.Protection Level: IP68
(1 meter water depth, 24 hours); IP69K
- 7.Cable: PVC/PUR sheathed wire, black outer sheath
- 8.Temperature Range: −25℃~85℃
- 9.Cable Length Tolerance:

01~03m: ±25mm

04~06m: ±50mm

07~10m: ±75mm

11~20m: ±100mm

21~30m: ±200mm

31~99m: ±300mm

5PM-M12D - 04P - MM-SL8AXX - 00AH

Coding: A,B,D,S,T

Poles

Cable length:

01: 01Meter

02: 02Meters

.

.

99: 99Meters

Standard

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.

		DRAWN:	DATE:	PART NO:	
		K. ZHAO	08/10/2021	5PM-M12D-04P-MM-SL8AXX-00AH	
		T. Pan	08/10/2021	M12D, Straight headed female end	
SIZE:	SCALE:	CHECKED:	DATE:	TITLE:	NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
A4	4 : 3	H. JIANG	08/10/2021		
UNIT:mm	SHEET:	APPROVED:	DATE:	CUSTOMER:	Email: sales@cymanu.com WWW.CYMANU.COM
	1 / 1				