


Number of Positions	3P		4P	
Coding				
Current/Voltage	12A/63V		12A/63V	
Voltage Proof	0.84kV		0.84kV	
Rated Impulse Voltage	1.5kV		1.5kV	
Wire specifications	1.5mm ² /16AWG		1.5mm ² /16AWG	
Wire Color	PIN	WIRE	PIN	WIRE
	1	Brown	1	Brown
	2		2	White
	3	Blue	3	Blue
	PE	Black	PE	Black

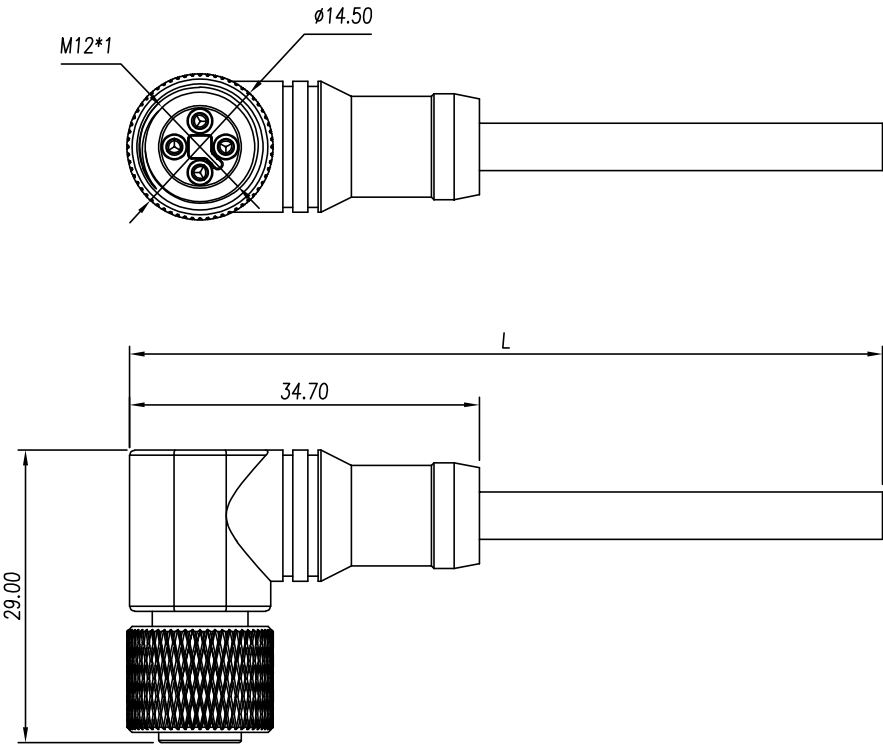

- Technical Parameter:
- 1.Insulation Resistance: $\geq 100M\Omega$
 - 2.Contact Resistance: $\leq 5m\Omega$
 - 3.Durability: ≥ 100 cycles
 - 4.Locking Torque: 0.4Nm
 - 5.Compliant with RoHS
 - 6.Protection Level: IP68
(1 meter water depth, 24 hours); IP69K
 - 7.Cable: PVC/PUR sheathed wire, black outer sheath
 - 8.Temperature Range: $-25^{\circ}C\sim 85^{\circ}C$
 - 9.Cable Length Tolerance:
 - 01~03m: $\pm 25mm$
 - 04~06m: $\pm 50mm$
 - 07~10m: $\pm 75mm$
 - 11~20m: $\pm 100mm$
 - 21~30m: $\pm 200mm$
 - 31~99m: $\pm 300mm$

5PM-M12T - XXP - FF-SR8AXX - 00AH

Coding: A,B,D,S,T Poles Cable length: Standard

01: 01Meter
02: 02Meters
.
.
99: 99Meters

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.