


Number of Positions	3P		4P	
Coding				
Current/Voltage	12A/63V		12A/63V	
Voltage Proof	0.84kV		0.84kV	
Rated Impulse Voltage	1.5kV		1.5kV	
Wire specifications	1.5mm ² /16AWG		1.5mm ² /16AWG	
Wire Color	PIN	WIRE	PIN	WIRE
	1	Brown	1	Brown
	2		2	White
	3	Blue	3	Blue
	PE	Black	PE	Black

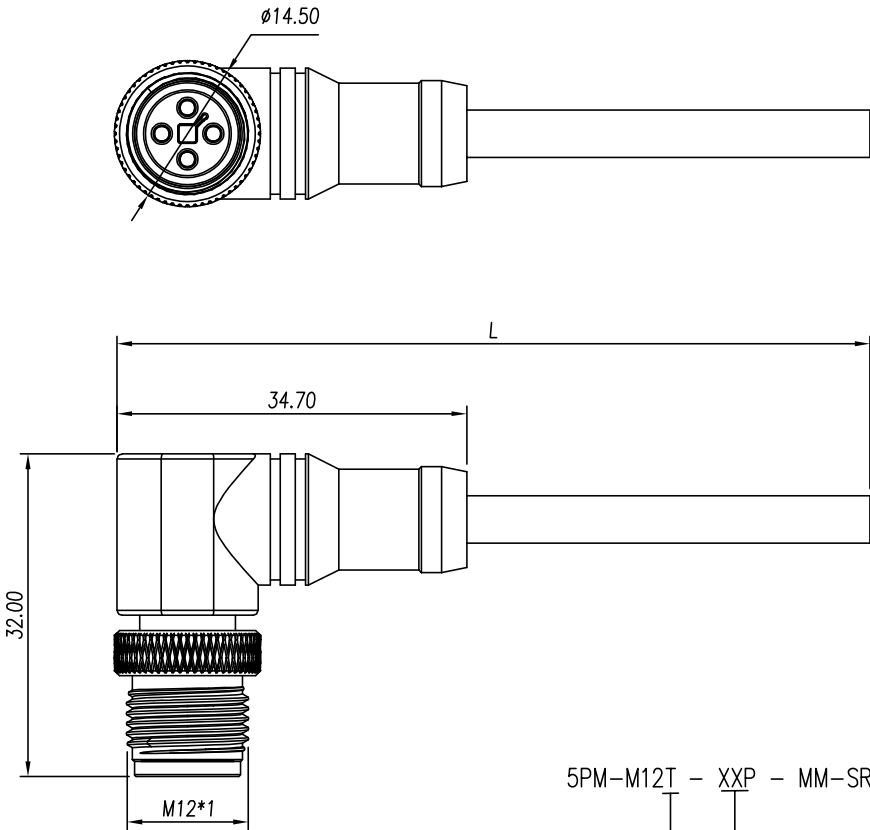

Technical Parameter:

- 1.Insulation Resistance: ≥100MΩ
- 2.Contact Resistance: ≤5mΩ
- 3.Durability: ≥100 cycles
- 4.Locking Torque: 0.4Nm
- 5.Compliant with RoHS
- 6.Protection Level: IP68
- (1 meter water depth, 24 hours); IP69K
- 7.Cable: PVC/PUR sheathed wire, black outer sheath
- 8.Temperature Range: -25℃~85℃
- 9.Cable Length Tolerance:
- 01~03m: ±25mm
- 04~06m: ±50mm
- 07~10m: ±75mm
- 11~20m: ±100mm
- 21~30m: ±200mm
- 31~99m: ±300mm

5PM-M12T - XXP - MM-SR8AXX - 00AH

Coding: A,B,D,S,T

Poles

Cable length:

01: 01Meter

02: 02Meters

.

99: 99Meters

Standard

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.