






PG9:
5SD-M12S-XXP-FF-SL7010-00AH



M16*1.5:
5SD-M12S-XXP-FF-SL7011-00AH

Installation shell opening: maximum thickness 4.5mm,
Installation torque 1.25Nm

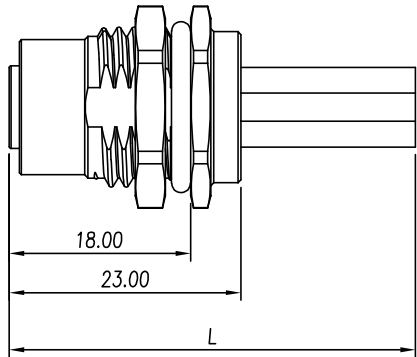

Number of Positions	3P	4P		
Coding				
Current/Voltage	12A/630V	12A/630V		
Voltage Proof	3. 31kV	3. 31kV		
Rated Impulse Voltage	6. 0kV	6. 0kV		
Wire specifications	1. 5mm ² /16AWG	1. 5mm ² /16AWG		
Wire Color	PIN	WIRE	PIN	WIRE
	1	Black	1	Black
	2		2	Black
	3	Black	3	Black
	PE	Yellow/Green	PE	Yellow/Green

Remarks: Pollution Level (3)/Overvoltage Category (II)/Material Group (I)

REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	2025/01/03	

Technical Parameter:
1.Insulation Resistance: $\geq 100M\Omega$
2.Contact Resistance: $\leq 5m\Omega$
3.Durability: ≥ 100 cycles
4.Locking Torque: 0.4Nm
5.Compliant with RoHS
6.Protection Level: IP68
(1 meter water depth, 24 hours); IP69K
7.Cable: PVC/PUR sheathed wire, black outer sheath
8.Temperature Range: $-25^{\circ}C\sim 85^{\circ}C$
9.Cable Length Tolerance:
01~03m: $\pm 25mm$
04~06m: $\pm 50mm$
07~10m: $\pm 75mm$
11~20m: $\pm 100mm$
21~30m: $\pm 200mm$
31~99m: $\pm 300mm$

Thread type:
0: PG9
1: M16*1.5

5SD-M12S - XXP - FF-SL7XXX - 00AH

Coding: A,B,D,S,T

Poles

Cable length:
01: 01Meter
02: 02Meters
.
.
99: 99Meters

Standard

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.

		DRAWN: K. ZHAO	DATE: 2025/01/03	PART NO: 5SD-M12S-XXP-FF-SL7011-00AH	 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymanu.com WWW.CYMANU.COM
SIZE: A4	SCALE: 4 : 3	CHECKED: T. Pan	DATE: 2025/01/03	TITLE: M12S, Female, backend installation	
UNIT:mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 2025/01/03	CUSTOMER:	