




REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/14/2024	

PLR (Separately packaged)



NOTES:

- 1.Rate Current:13A
- 2.Rate Voltage:250V
- 3.Dielectric voltage withstand: 1500V
- 4.Wire range :14~20AWG;0.5~2.0mm²
- 5.Pitch :8.66mm, Poles :3 P
- 6.Temperature Range: -55℃~125℃
- 7.Protection degree:IP68
(1meter deep water,lasting for 24 hours);
IP69K
- 8.RoHS Compliance

9.





CONTACT SIZE	INSULATION SIZE	WIRE RANGE
16	2.24-3.68 mm	14-20 AWG

Material:

- 1.Housing:PA66 GF, UL94V-0
- 2.PLR:PA66 GF ,UL94V-0, GREEN
- 3.Cable Seal: VMQ,ORANGE

PART NUMBER CHART

NUMBER	COLOR
63CT0403P3310B	GREY
63CT0403P2210B	BLACK
63CT0403P4310B	GREEN
63CT0403P8310B	BROWN

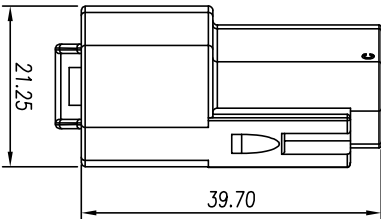

linear dimension											
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12 0.4

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE:	SCALE:	CHECKED:	DATE:	DRAWN:	DATE:
A4	1 : 1	T. Pan	09/14/2024	K. ZHAO	09/14/2024
UNIT: mm	SHEET:	APPROVED:	DATE:		
1 / 1	1 / 1	H. JIANG	09/14/2024		

63CT0403PYY10B

TITLE:
Auto Connector,3 Position,Male

PART NO.:

CUSTOMER:

NINGBO CHANGTU ELECTRONICS MANUFACTURING CO., LTD

Email: sales@cymannu.com

www.CYMANNU.COM