
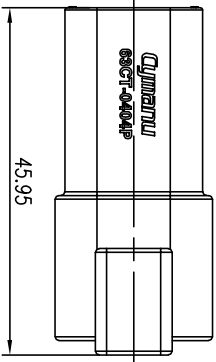


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/14/2024	

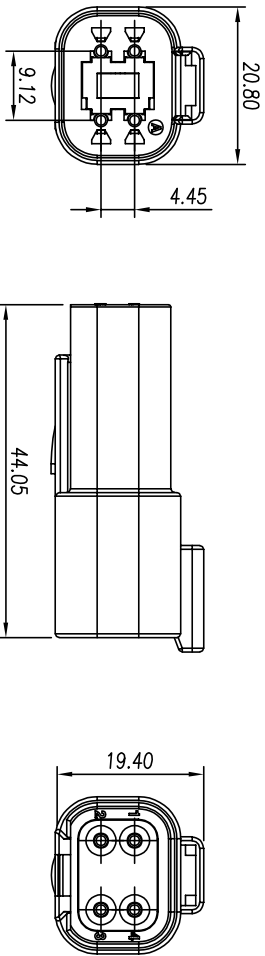

NOTES:

- 1.Rate Current:13A
- 2.Rate Voltage:250V
- 3.Dielectric voltage withstand: 1500V
- 4.Wire range :14~20AWG;0.5~2.0mm²
- 5.Pitch : 4.45mm, Poles : 4 P
- 6.Temperature Range: -55℃~125℃
- 7.Protection degree:IP68
- 8.RoHS Compliance



CONTACT SIZE	INSULATION SIZE	WIRE RANGE
16	2.24-3.68 mm	14-20 AWG

Material:

- 1.Housing:PA66 GF, UL94V-0
- 2.PLR:PA66 GF ,UL94V-0, GREEN
- 3.Cable Seal: VMQ,ORANGE

PART NUMBER CHART

NUMBER	COLOR
63CT0404P3310B	GREY
63CT0404P2210B	BLACK
63CT0404P4310B	GREEN
63CT0404P8310B	BROWN

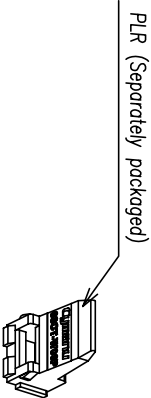

linear dimension										≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120			
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4		

Remark: This drawing is a controlled document for Cymannu. All specifications are subject to change without prior notice.

SIZE:	SCALE:	CHECKED:	DATE:	DATE:	PART NO.:
A4	1 : 1	T. Pan	09/14/2024	09/14/2024	63CT0404PYY10B
UNIT:mm	SHEET: 1 / 1	APPROVED: H. JIANG	DATE: 09/14/2024		TITLE: Auto Connector,4 Position,Male
					CUSTOMER: