



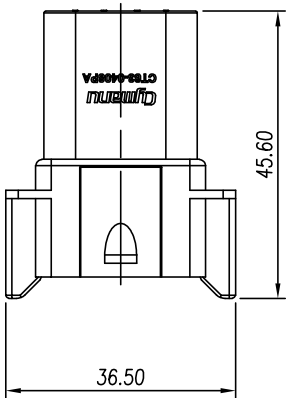


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/18/2024	

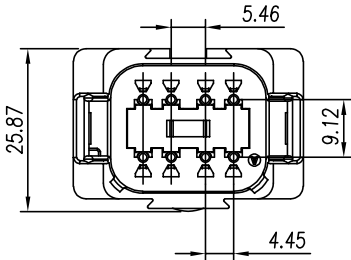

NOTES:

- 1.Rate Current:13A
- 2.Rate Voltage:250V
- 3.Dielectric voltage withstand: 1500V
- 4.Wire range :14~20AWG;0.5—2.0mm²
- 5.Pitch :4.45mm, Poles :8 P
- 6.Temperature Range: -55℃~125℃
- 7.Protection degree:IP68
(1meter deep water,lasting for 24 hours);
IP69K
- 8.RoHS Compliance

9.

CONTACT SIZE	INSULATION SIZE	WIRE RANGE
16	2. 24-3. 68 mm	14-20 AWG

Material:

- 1.Housing:PA66 GF, UL94V-0
- 2.PLR:PA66 GF ,UL94V-0, GREEN
- 3.Cable Seal: VMQ,ORANGE


	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.


		DRAWN: K. ZHAO	DATE: 09/18/2024	PART NO: 63CT0408PXY10B
		CHECKED: T. Pan	DATE: 09/18/2024	TITLE: Auto Connector,8 Position,Male
UNIT:mm	SHEET: 1 / 2	APPROVED: H. JIANG	DATE: 09/18/2024	CUSTOMER:

NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD
Email: sales@cymanu.com WWW.CYMANU.COM


REV	ECN	SIGN	DATE	DESCRIPTION
1.0	V0	K. ZHAO	09/18/2024	




63CT0408PA3310B
type A, GREY




63CT0408PB2210B
type B, BLACK




63CT0408PC4310B
type C, GREEN



63CT0408PD8310B
type D, BROWN



PLR (Separately packaged)



Remark: This drawing is a controlled document for Cymanu. All specifications are subject to change without prior notice.

		DRAWN: K. ZHAO	DATE: 09/18/2024	PART NO: 63CT0408PXY10B	 NINGBO CHANGYU ELECTRONICS MANUFACTURING CO., LTD Email: sales@cymanu.com WWW.CYMANU.COM
SIZE: A4	SCALE: 5 : 6	CHECKED: T. Pan	DATE: 09/18/2024	TITLE: Auto Connector,8 Position,Male	
UNIT:mm	SHEET: 2 / 2	APPROVED: H. JIANG	DATE: 09/18/2024	CUSTOMER:	